




FoxESS LV2600



FoxESS LV5200

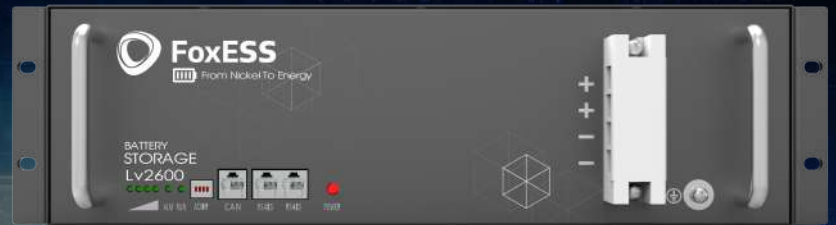

Long Life

Rated life span of more than 6000 cycles.



Expandable

Storage capacity is expandable to 20.48kWh.



High Efficiency

98% charge/discharge efficiency.



Easy Installation

Easy, plug and play installation.



Low Voltage



Easy Installation



High Efficiency



Expandable System



90% DoD

The LV2600 & LV5200 are high-performance, scalable, low-voltage battery storage modules.

- 98% Charge/Discharge Efficiency
- 90% Depth of Discharge
- Wide Temperature Tolerance
- Easy Installation
- >6000 Life Cycles
- CAN/RS485 Communication
- Low Voltage



FoxESS LV2600 | LV5200

BATTERY MODULES

SPECIFICATIONS	LV2600	LV5200
Nominal Capacity (kWh)	2.56	5.12
Nominal Voltage (V)	51.2	51.2
Operating Voltage Range (V)	44.5 - 58.2	44.5 - 58.2
Depth of Discharge (%)	95	90
Roundtrip Efficiency (%)	>99%	>99%
Rec. Charge/Discharge Current (A)	50	100
Max. Charge/Discharge Current (A) (30s)	75	150
Charge/Discharge Efficiency (%)	98%	98%
Operating Temperature (°C)	-10 - 50°C	-10 - 50°C
Storage Temperature (°C)	-20 - 60°C	-20 - 60°C
Humidity (%)	4% to 100% condensing	4% to 100% condensing
Protection Level	IP21	IP21
Cycle Life	≥6000	≥6000
Safety	CE, RCM, TUV (IEC62619) UL1973, ROHS	CE, RCM, TUV (IEC62619) UL1973, ROHS
EMC	IEC-61000-6-1/3	IEC-61000-6-1/3
UN Number	UN3840	UN3840
Weight (kg)	29.5	52
Dimensions (H*W*D) (mm)	116*480*440	600*342*207

